


HIGH TEMP PVC FINELINE MASKING TAPE

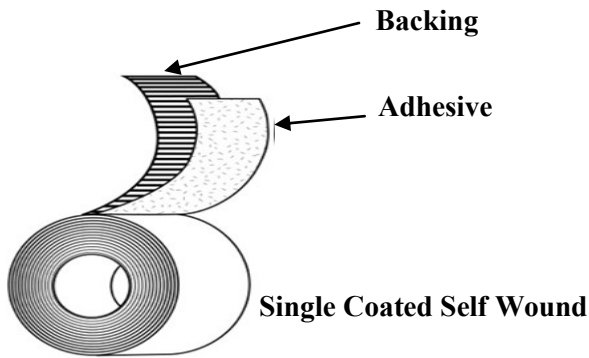

Backing: PVC Film
Adhesive: Rubber
Colors: Blue Gloss
Specifications: N/A
Size Options: 1.5" - 47.5" x LY

APPLICATIONS

- *Automotive OEM fineline and bulk masking (Rim & TPO plastics)
- *High temperature bake cycles (280°F for 45 minutes)
- *Short-term outdoor masking (72 hours)
- *Aircraft paint operations
- *OEM paint line powerwash cycles
- *Clean room paint masking
- *Automotive metal parts masking

FEATURES:

- *PVC Film Backing
- *Rubber Based Adhesive
- *Clean-cut Plastic core

BENEFITS:

- *Solvent and moisture resistant
- *Handles compound and tight radius curves
- *Crisp, fineline edge
- *Printable backing
- *Good high temperature performance
- *Clean removability after bake cycle
- *Recyclable and clean—no dust or contaminants

PHYSICAL PROPERTIES:

	STANDARD UOM		METRIC UOM		TEST METHOD
Total Thickness	5.0	mils	.127	mm	PSTC-133
Substrate Thickness	3.5	mils	.089	mm	PSTC-133
Adhesion to Steel	26	oz/in	2.84	N/cm	ASTM D-3330
Tensile Strength	11	lb/in	19.26	N/cm	ASTM D-3759
Elongation	160%				
Application Temperature	60°F to 120°F		16°C to 49°C		
Operating Temperature	40°F to 280°F		4.4°C to 138°C		

*Room Temperature damask recommended, Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F, Standard Shelf Life (at 25C): 12 months from date of manufacture.



Custom Fabricating & Supplies

5500 Oakwood Park Drive ~ Franklin, WI 53132
 P: 414.421.2600 ~ Toll: 800.556.7188 ~ F: 414.421.2700
www.customfabricate.com

